




SKIOLD AIR INLET VALVES



Wall inlet

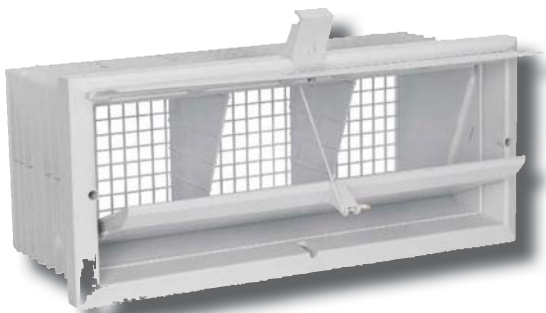

Ceiling inlet

SKIOLD MAKES THE DIFFERENCE!

SKIOLDS air inlet valves are made from polystyrene plastic. The valve flap is insulated.
 Use a high pressure water cleaner from a distance of minimum 1 metre to clean the air inlet valves.
 The air inlet valves are automatically opened and closed using a linear servo actuator.
 The air inlet valves are connected using 2.1mm stainless steel wire.
 Moulded with a drip edge to ensure that condensed water is kept away from the wall.
 A moulded-in snap lock makes it possible to close the air inlet valves permanently, e.g. during very cold weather.

FACTS AIR INLET VALVES


| Item no. | Type | Material | Fitting | Valve size (ext.) (h x w x d) | Wall/ceiling hole size | Air capacity (m ³ /h at -10 Pa) | Air capacity (m ³ /h at -20 Pa) |
|-------------------------------|---------------------------|-------------|-------------------------|----------------------------------|---------------------------|---|---|
| 140425000635 | Wall inlet valve 248mm | Polystyrene | Recessed/ moulded in | 260x650x248mm | 280x670x248 mm | 1440 | 2015 |
| 140425000610 | Wall inlet valve 285mm | Polystyrene | Recessed/ moulded in | 260x650x285mm | 280x670x285mm | 1415 | 2000 |
| 140425000620 | Wall inlet valve 311mm | Polystyrene | Recessed/ moulded in | 260x650x311mm | 280x670x311mm | 1415 | 2000 |
| 140425000635+ 140420500110 | Wall inlet valve 348mm | Polystyrene | Recessed/ moulded in | 260x650x348mm | 280x670x348mm | 1415 | 2000 |
| 140425000700 | Ceiling inlet valve | Polystyrene | Ceiling | 260x650x200mm | 280x670x200mm | 1440 1000 (at -5 Pa)* | 2015 |

*Should be dimensioned at -5 Pa.




Valve size

Hole size:

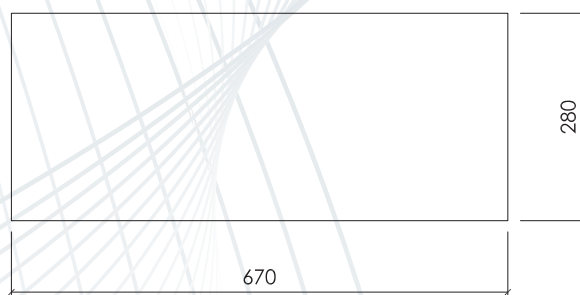

External size:

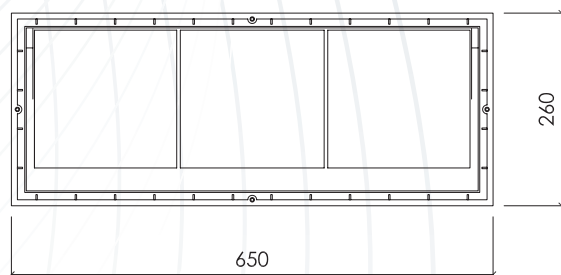

All measures in mm

